



motorola



hellosecurity

MTIBM074722

4MP IP Motorized Varifocal Face Detection Camera

Features:

1/3" CMOS sensor

4MP (2592 × 1520 resolution)

Motorized varifocal lens 2.8 - 12 mm

Intelligent Analytics: Face Detection, Face Capture, Target Counting (human/vehicle distinction), Region Entrance/Exiting, Intrusion Detection (human/vehicle distinction), Line Crossing Detection (human/vehicle distinction), Human tracking

True WDR, 120dB

Supports BLC, HLC, Smart IR, Defog

H.265+ / H.265 / H.264+ / H.264 / MJPEG

Audio input and output connections

Alarm input and output connections

3D DNR digital noise reduction

High Frame Rate Mode: 1080P / 720P @60fps

Micro SD storage for storage of up to 256GB

70m Infrared night view distance

Ingress protection IP67

Works with PoE



ONVIF Profile S and Profile G



Model: MTIBM074722

Camera	
Camera Type	Bullet
Image Sensor	1/3" CMOS
Lens	Varifocal Motorized 2.8mm ~ 12mm @ F1.3, horizontal field of view 100° ~ 28.9°
Mount Type	Ø14
Scanning System	Progressive
Image Size	2592 x 1520
Iris Type	DC Iris
Electronic Shutter Speed	NTSC: 1/2s~1/100,000s PAL: 1/2s~1/100,000s
Minimum Illumination	0.005 lux @ F1.3, AGC ON; 0 lux with IR
IR Distance	70m
Angle Adjustment	Pan: 0° ~ 360°; Tilt: 0° ~ 90°; Rotation: 0° ~ 360°
Video	
Resolution	4MP (2592 x 1520), 2K (2560 x 1440), 3MP (2304 x 1296), 1080P (1920 x 1080), 720P (1280 x 720), D1, CIF, (480 x 240)
Video Compression	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Image System	NTSC / PAL
Frame Rate	Main Stream: NTSC 60Hz: 4MP / 2K / 3MP / 1080P / 720P (1~30fps) NTSC 50Hz: 4MP / 2K / 3MP / 1080P / 720P (1~25fps)
	Sub Stream: NTSC 60Hz: 720P / D1 / CIF / 480*240 (1~30fps) PAL 50Hz: 720P / D1 / CIF / 480*240 (1~25fps)
	Third Stream: NTSC 60Hz: D1 / CIF / 480*240 (1~30fps) PAL 50Hz: D1 / CIF / 480*240 (1~25fps)
Stream Capability	3 Streams
High Frame Rate Mode	Main Stream 1080P / 720P (1~60fps / 1~50fps)
Bit Rate	64 Kbps ~ 8 Mbps
Bit Rate Type	VBR / CBR
Audio Compression	G711A / U
BLC	Yes
HLC	Yes
WDR	120dB
Defog	Yes
AGC	Yes
Noise Reduction	3D DNR
Day/Night	Automatic ICR
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
ROI	Each ROI can be configured separately
Motion Detection	Yes
Privacy Masking	Max. 4 Areas
Mirror	Yes
Flip	Yes
Software & Network	
Remote Monitoring	Web browsing, MVMS, hellosecurity APP
Management Software	MVMS Lite, Standard, Professional
Mobile APP	iOS, Android
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Protocol	TCP/IP UDP DHCP NTP RTSP PPPoE DDNS SMTP FTP, HTTPS, SNMP, 802.1X, QoS
Interoperability	ONVIF (Profile S/Profile G), P2P
Bandwidth Self-adaptation	Yes
Browser	IE11(plugin-in required)/Chrome 89.0+/Edge 89.0+/Firefox 87.0+/Safari 14.0+
Interfaces	
Video Output (CVBS)	CVBS output (BNC x 1)
Audio In/Out	1/1
Alarm In/Out	1/1
Built in Mic	No
RS485	No
Hardware Reset	Yes
Micro SD Card Slot	Yes (up to 128GB)
Ingress Protection	IP67
Vandal Resistance	IK10*
Network	RJ45 10/100 Mbps
Functions	
Smart Alarm	Motion detection; Sensor alarm; SD card error; SD card full; IP conflict; Network disconnection
Intelligent Analytics	Face Detection, Face Capture, Target Counting (human/vehicle distinction), Region Entrance/Exiting, Intrusion Detection (human/vehicle distinction), Line Crossing Detection (human/vehicle distinction), Abandoned/Missing object
General function	Watermark, IP address filtering, video mask, heartbeat, password protection, non-photosensitive switch, image distortion correction
Others	
Power Supply	DC12V / PoE (802.3af)
Power Consumption	< 9W
Operating Environment	-30°C ~ +60°C Humidity: less than 95% (non condensing)
Casing	Metal
Dimensions (mm)	278.3 x 100.3 x 88.7
Weight (net)	Approx. 1.04kg

hellosecurity

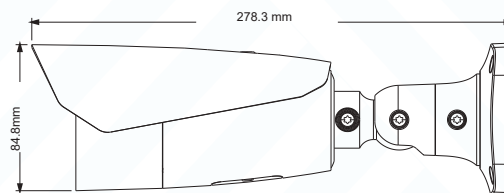

DORI Distance				
Lens	Detect	Observe	Recognize	Identify
2.8~12mm(W)	58.91m(193.27 ft)	23.56m(77.29 ft)	11.78m(38.64 ft)	5.89m(19.32ft)
2.8~12mm(T)	205.99m(675.82ft)	82.40m(270.34ft)	41.20m(135.17ft)	20.60m(67.58ft)

*Camera Housing with IK10 rating.

Manufactured, distributed or sold by MDX Electronics, LLC, official licensee for this product. MOTOROLA and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners. © 2022 Motorola Mobility LLC. All rights reserved.