



motorola



hellosecurity

MTIDM032702 2MP IP Dome Camera

General features:



- 1/2.8" CMOS sensor
- 2MP high resolution
- Supports H.265+ / H.265 / H.264+ / H.264
- Intelligent Analytics: Line crossing/Intrusion detection/Exception
- IP67 Ingress protection
- Automatic ICR
- Built-in microphone
- Audio In connection
- ROI Coding
- Supports micro-SD card (up to 256GB)
- 30m IR infrared night view distance
- POE
- ONVIF Profile S & G compliant
- Digital WDR



Model: MTIDM032702

Camera	
Camera Type	Mini Dome
Image Sensor	1/2.8" CMOS
Lens	Fixed 2.8mm @ F1.6, horizontal field of view: 107°
Mount Type	M12
Scanning System	Progressive
Image Size	1920 × 1080
Iris Type	Fixed
Electronic Shutter Speed	NTSC: 1/3s~1/100,000s PAL: 1/3s~1/100,000s
Minimum Illumination	0.008 lux @ F1.6, AGC ON; 0 lux with IR
IR Distance	30m
Angle Adjustment	Pan: 0° ~ 360°; Tilt: 0° ~ 75°; Rotation: 0° ~ 360°
Video	
Resolution	1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, (480 × 240)
Video Compression	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Image System	NTSC / PAL
Frame Rate	Main Stream: NTSC: 60Hz : 1080P / 720P (1~30fps) PAL: 50Hz : 1080P / 720P (1~25fps)
	Sub Stream: NTSC: 60Hz : D1 / CIF / (1~30fps) PAL: 50Hz : D1 / CIF / (1~25fps)
Stream Capability	2 Streams
High Frame Rate Mode	No
Bit Rate	128 Kbps ~ 4 Mbps
Bit Rate Type	VBR / CBR
Audio Compression	G711A / U
BLC	Yes
HLC	Yes
WDR	Digital
Defog	No
AGC	Yes
Noise Reduction	DNR
Day/Night	Automatic ICR
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
ROI	Each ROI can be configured separately
Motion Detection	Yes
Privacy Masking	Max. 4 Areas
Mirror	Yes
Flip	Yes
Software & Network	
Remote Monitoring	Web browsing, MVMS, hellosecurity APP
Management Software	MVMS Lite, Standard, Professional
Mobile APP	iOS, Android
Online Connection	Support simultaneous monitoring for up to 3 users; Support multi-stream real time transmission
Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, HTTPS, SNMP, 802.1X, QoS
Interoperability	ONVIF (Profile S/Profile G) P2P Optional
Bandwidth Self-adaptation	Yes
Browser	IE (plug-in required)/Google Chrome/Edge/Firefox/Safari
Interfaces	
Video Output (CVBS)	No
Audio In/Out	1/0
Alarm In/Out	0/0
Built in Mic	Yes
RS485	No
Hardware Reset	Yes
Micro SD Card Slot	Yes (up to 256GB)
Ingress Protection	IP67
Vandal Resistance	IK10 housing only
Network	RJ45 10/100 Mbps
Functions	
Smart Alarm	Motion detection; Sensor alarm; SD card error; SD card full; IP conflict; Network disconnection
Intelligent Analytics	Line Crossing Detection, Intrusion Detection, Exception
General function	Watermark, IP address filtering, video mask, heartbeat, password protection

hellosecurity

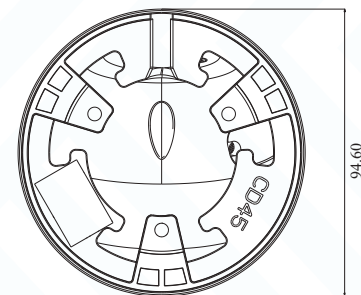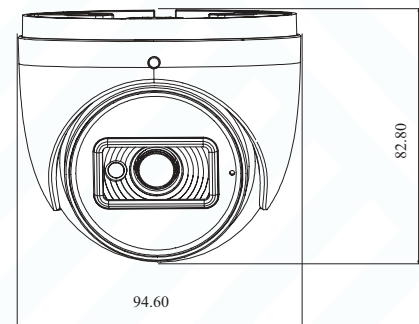

Others	
Power Supply	DC12V / PoE (802.3af)
Power Consumption	< 4.5W
Operating Environment	-30°C ~ +60°C Humidity: less than 95% (non condensing)
Casing	Metal
Dimensions (mm)	94.6 x 82.8
Weight (net)	Approx. 0.46kg

DORI Distance				
Lens	Detect	Observe	Recognize	Identify
2.8mm	40.62m(133.26ft)	16.25m(53.31ft)	8.12m(26.64ft)	4.06m(13.32ft)
3.6mm	49.68m(162.99ft)	19.87m(65.19ft)	9.94m(32.61ft)	4.97m(16.30ft)