



motorola



hellosecurity

MTIDM038801

8MP IK10 Dome IP Camera

General characteristics:

1/2.8" CMOS sensor

8MP (3840 × 2160) 4K High resolution

H.265+/H.265/H.264+/H.264/MJPEG coding

30m Infrared night view distance

Intelligent Analytics: Line Crossing, Region Intrusion, Exception

120dB WDR

3D DNR, HLC, BLC, ROI coding

Built in MIC and MIC IN Audio input; Hardware reset

Built-in micro SD card slot for storage of up to 256GB

Auto ICR, true day/night

IP67 Ingress Protection

IK10 Impact Protection

Supports three streams

PoE

ONVIF Profile S and Profile G




motorola


Model: MTIDM038801

Camera	
Camera Type	Dome
Image Sensor	1/2.8" CMOS
Lens	Fixed 2.8mm @ F1.6, horizontal field of view 101°
Mount Type	M12
Scanning System	Progressive
Image Size	3840 x 2160
Iris Type	Fixed
Electronic Shutter Speed	NTSC: 1/1s~1/100,000s PAL: 1/1s~1/100,000s
Minimum Illumination	0.02 lux @ F1.6, AGC ON; 0 lux with IR
IR Distance	30m
Angle Adjustment	Pan: 0° ~ 355°; Tilt: 0° ~ 67°; Rotation: 0° ~ 355°
Video	
Resolution	8MP (3840 × 2160), 6MP (3072 × 2048), 5MP (2592 × 1944), 4MP, 2MP, 720P (1280 × 720), D1, CIF, (480 × 240)
Video Compression	H.265+/H.265/H.264+/H.264/MJPEG
Image System	NTSC / PAL
Frame Rate	Main Stream:
	NTSC 60Hz: 8MP (1-20fps) / 6MP/5MP/4MP/2MP (1~30fps) PAL 50Hz: 8MP (1-15fps) / 6MP/5MP/4MP/2MP (1~25fps)
	Sub Stream:
	NTSC 60Hz: 720P / D1 / CIF (1~30fps) PAL 50Hz: 720P / D1 / CIF (1~25fps)
Third Stream:	NTSC 60Hz: D1 / CIF / 480*240 (1~30fps) PAL 50Hz: D1 / CIF / 480*240 (1~25fps)
Stream Capability	3 Streams
High Frame Rate Mode	No
Bit Rate	64 Kbps ~ 12 Mbps
Bit Rate Type	VBR / CBR
Audio Compression	G711A / U
BLC	Yes
HLC	Yes
WDR	120dB
Defog	Yes
AGC	Yes
Noise Reduction	3D DNR
Day/Night	Automatic ICR
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
ROI	Each ROI can be configured separately
Motion Detection	Yes
Privacy Masking	Max. 4 Areas
Mirror	Yes
Flip	Yes
Software & Network	
Remote Monitoring	Web browsing, MVMS, hellosecurity APP
Management Software	MVMS Lite, Standard, Professional
Mobile APP	iOS, Android
Online Connection	Support simultaneous monitoring for up to 10 users;
	Support multi-stream real time transmission
Protocol	TCP/IP UDP DHCP NTP RTSP PPPoE DDNS SMTP FTP, HTTPS, SNMP, 802.1X, QoS
Interoperability	ONVIF (Profile S/Profile G) P2P Optional
Bandwidth Self-adaptation	Yes
Browser	IE (plug-in required)/Google Chrome/Edge/Firefox/Safari
Interfaces	
Video Output (CVBS)	No
Audio In/Out	1/0
Alarm In/Out	0/0
Built in Mic	Yes
RS485	No
Hardware Reset	Yes
Micro SD Card Slot	Yes (up to 256GB)
Ingress Protection	IP67
Vandal Resistance	IK10
Network	RJ45 10/100 Mbps
Functions	
Smart Alarm	Motion detection; Sensor alarm; SD card error; SD card full; IP conflict; Network disconnection
Intelligent Analytics	Line Crossing Detection, Intrusion Detection, Exception
General function	Watermark, IP address filtering, video mask, heartbeat, password protection
Others	
Power Supply	DC12V / PoE (802.3af)
Power Consumption	< 7W
Operating Environment	-30°C ~ +60°C
	Humidity: less than 95% (non condensing)
Casing	Metal
Dimensions (mm)	119 x 87.8
Weight (net)	Approx. 0.64kg

hellosecurity



119.00mm

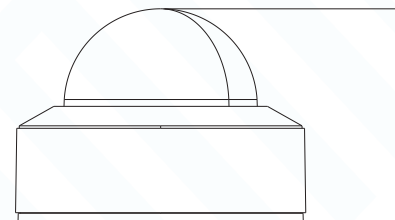

87.80mm