




motorola

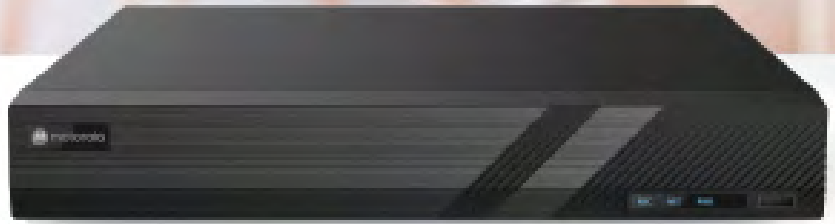

hellosecurity

MTN081T0842

8-CH POE Face Recognition 12MP NVR

General Characteristics:

- Supports 8 channels at 12MP / 8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P IP input
- Supports 8 POE network ports
- Dual stream recording all channels 12MP/8MP/5MP/4MP/3MP/1080P/960P/720p @30fps
- Supports Smart H.265, H.265+, H.265 and H.264
- Supports Face Detection by NVR in 2 channels / Face Detection by camera in 8 channels
- Face recognition/match supported on 6 channels
- Dual HDMI Outputs for multi-screen display: 8CH (HDMI1) + 8CH (HDMI2)
- 4K output, true high resolution display
- 8 Alarm inputs and 4 Alarm outputs
- Intuitive and user-friendly Graphic User Interface in Windows style operation
- Multi-mode recording: manual / timer / motion / sensor / analytic
- Playback : 8 CH simultaneous playback
- Search : time slice, time, event (manual, sensor, motion), tag search
- Remote access control via web browser, Mobile App and MVMS software
- Supports POS connection on all 8 channels

Model: MTN081T0842

System	OS	Embedded Linux
Video	Compression	H.265S/H.265+/H.265/H.264
	IP Video Input	8CH IPC input
	Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF
	Network Bandwidth	80Mbps/80Mbps (incoming/outgoing)
	Output	HDMI1 : 3840 × 2160 / 1920 × 1080 / 1280 × 1024 / 1024 × 768 VGA ×1 : 1920 × 1080 / 1280 × 1024 / 1024 × 768 VGA can be set to output the same or different video source with HDMI
Audio	Network Input	8 CH IPC audio input
	2-way Audio	RCA × 1
	Local Output	RCA × 1
	Compression	G.711(U/A)
Record	Record Stream	Dual stream recording
	Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF
	Frame Rate	NTSC: 30fps; PAL: 25fps
Playback	Simultaneous Playback	Max 8 CH
	Search	Time slice / time / event / tag / smart search
	Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events
	Function	Play, pause, FF, FB, digital zoom, etc.
Decoding Capability	Live View/ Playback	1CH 12MP/4CH 1080P
Multi-Screen Display Mode	Mode	Dual output mode (default mode): supports HDMI and VGA output (different source) , but doesn't support AI by device AI mode: Different source output and 12MP video input (live view/ playback) are unavailable, but 8MP video input supports
	Dual Output Mode	8CH (HDMI1) +8CH (VGA)
	AI Mode	8CH(HDMI1)
Alarm	Mode	Manual, sensor, motion, exception, smart events, etc.
	Input	8 CH local alarm input
	Output	4 CH
	Triggering	Record, snap, preset, e-mail, etc.
Face	Face Detection Performance (AI by IPC)	8 CH
	Face Detection Performance (AI by Device)	2 CH (2MP)
	Face Match Performance	6 CH
	Comparison Capability	18 pictures / second
	Face Picture Database	32 libraries 10000 Face Pictures
	Face Search	Search by picture is supported
	Database Management	Add, modify, delete and search face pictures
	Face Adding	Add face pictures through APP, WEB and external import
	Face Comparison	Supports allow list, block list and stranger match alarm
	Track	Track display on a map
	Statistical Graph	Bar graph

hellosecurity

Video Structure Analysis	Human/Vehicle Classification	Yes
Other Functions	Fisheye	Supports fisheye dewarping via Web Client and mobile APP
	Plate Recognition	Yes
PoE	PoE Port	RJ 45 100Mbps × 8
	Standard	IEEE802.3AF/AT
	Output Power	≤ 96W
Network	Interface	RJ 45 1000 Mbps × 1
	Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP, HTTP, HTTPS, 802.1x, RTSP, SNMP, ONVIF, etc.
	Client Connection	Max. 10 users access
Mobile Device	OS	iOS, Andriod
Storage	HDD Interface	SATA × 1, max 10T
Backup	Local Backup	U disk, USB mobile HDD
	Network Backup	Yes
External Interface	RS 485	Yes (full-duplex), connect to PTZ or keyboard
	USB	USB 3.0 × 1 ; USB 2.0 × 2
	Remote Controller	N/A
Others	Power Supply	DC48V/2.5A
	Consumption	≤ 20W (without HDD and PoE power supply)
	Environmental Protection	Complies with Directive EU RoHS, REACH and WEEE
	Dimensions(mm)	300 × 249 × 45 (W × D × H)
	Working Environment	-10 ~ 50 °C , 10% ~ 90% humidity

